

# TIM-W173SK


## 17.3 Inch Marine Monitor

### GENERAL

This specification defines the descriptions for the TIM-W173SK TFT LCD Monitor. TIM-W series is developed and designed for use in operator display such as Naval and Marine applications.

### KEY FEATURES

- 17.3 Inch display, 16:9 / 1920 x 1080 Resolution
- DVI, RGB Input
- Audio Input / 10 Watt Speaker Built-In
- Full Range Digital Dimming Control
- Picture in Picture (PIP)
- Capacitive touch OSD Control
- AC100~230V Power Input

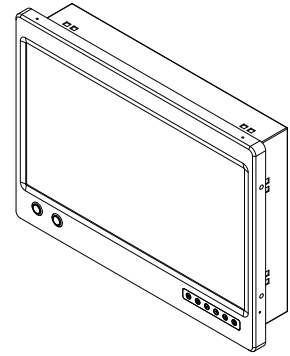


### GENERAL FEATURE


Section	Specifications
TFT Technology	Active Matrix Liquid Crystal Display Amorphous TFT (Thin Film Transistor) Anti-Glare & Anti-Reflective LED Backlight Technology
Viewable Size	17.3 inch diagonal
Active Area	381.888(H) x 214.812(V)mm
Resolution	1920 x 1080
Pixel Pitch	0.1989(H) x 0.1989(V)mm
Aspect Ratio	16:9
Response Time	18ms
Brightness	400cd/m <sup>2</sup>
Contrast Ratio	600:1
Viewable Angle	80°/80°/60°/80°(R/L /U/D)
Max Colors	16.7Million True Color
Synchronization Range	31~80KHz (Horizontal) 55~76Hz (Vertical)
Optimal Resolution	1920 x 1080 @60Hz
Detectable Resolution	640 x 480, 800 x 600, 1024 x 768, 1280 x 1024, 1920 x 1080
Input Signal	1 x VGA In 1 x DVI In 1 x Audio In 1 x PC Power/Alarm Button Control
Power Specification	100~230VAC 50/60Hz (Terminal Block)
Power Consumption	30W (MAX)
Product Dimension	420(W) x 80(D) x 310(H)mm
Weight	6.6kg
Operation Conditions	Temperature : -15°C to +55°C Humidity : up to 95%
Storage Conditions	Temperature : -20°C to +60°C Humidity : up to 95%
Options	Resistive Touch Screen, Anti Glare Glass, Optical Bonding, Sunlight Readable/High Brightness, RS-242/422/485, Buzzer, Composite Video, Sun Visor
Type Approval	IEC 60945, IACS E-10

# MARINE LCD MONITOR


## TIM-W173SK

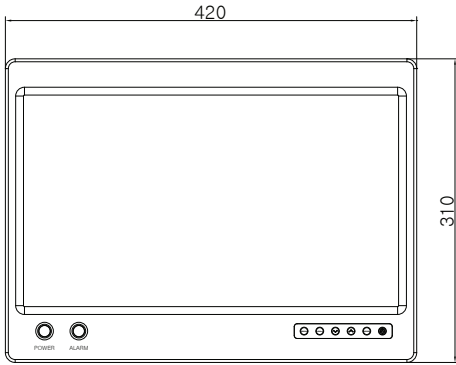


FRONT VIEW




SIDE VIEW



BOTTOM VIEW

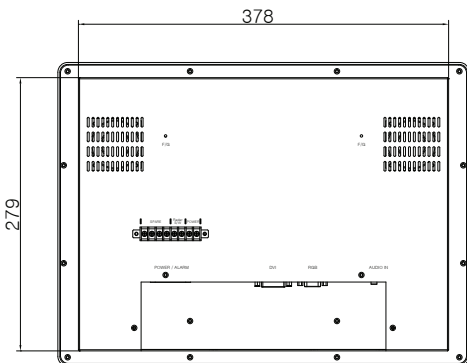

REAR VIEW

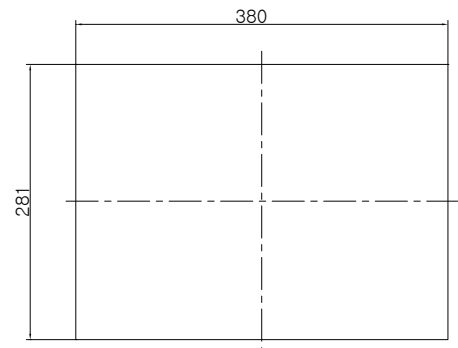

PANEL CUTTING

### Tetradyne Co., LTD.

#604/605, E&C VENTURE DREAM TOWER II, 55,  
 DIGITAL-RO 33-GIL, GURO-GU, SEOUL, 08376, REP KOREA  
 Tel : +82-2-323-4972  
 E-mail : [sales@tetradyne.co.kr](mailto:sales@tetradyne.co.kr)  
 Web site : [www.tetradyne.co.kr](http://www.tetradyne.co.kr)

Contact Point

Specifications and features are subject to change without notice.

All products names are trademarks or registered trademarks of Tetradyne.co.,Ltd.