

TVK-DM-002

Anti-vibration kit for Dell Monitor P2419H

GENERAL _

Dell 24 inch LCD monitor, P2419H is type approved for marine usage when it is used in conjunction with a TD Kit, TVK-DM-002. The combination (P2419H + TVK-DM-002) can be used in operator display in various industrial and marine applications.

KEY FEATURES _

- 24 inch LCD (LED backlight) monitor
- 1920 x 1080 (16:9) at 60Hz
- Power : 100 to 240 VAC , 50/60Hz
- Wide viewing angle by IPS pannel : 178/178
- Flicker-free screen with ComportView
- Display Port 1.2, HDMI 1.4, VGA, 2x USB 3.0, 2x USB 2.0
- Marine Certified by ABS, DNVGL, LR, KR, NK
- IACS E10 & IEC60945 for wheel-house installation




GENERAL FEATURE _

Section	Specifications
TFT Technology	Active matrix - TFT LCD
Viewable Size	24 inch diagonal
Active Area	296.46 mm (H) x 527.04 mm (W)
Resolution	1920 x 1080
Pixel Pitch	0.275 mm (H) x 0.275 mm (V)
Aspect Ratio	16 : 9
Response Time	8 ms
Brightness	250cd/ m ²
Contrast Ratio	1000 : 1
Viewable Angle	R/L 178°, U/D 178°
Max Colors	16.7 Million colors
Synchronization Range	30 kHz ~ 83kHz (Horizontal) 56 kHz ~ 76kHz (Vertical)
Optimal Resolution	1920 x 1080 @ 60Hz
Input Signal	1 x DP
	1 x HDMI
	1 x VGA
	1 x USB 3.0 port (Upstream)
	2 x USB 3.0 port (Side)
Power Specification	2 x USB 2.0 port (Bottom)
	100VAC ~ 240VAC , 50/60Hz , 1.5A
Consumption	42W (MAX)
Dimension (Kit mounted)	537. 8(W) x 378(H) x 166(D) mm
Weight (Kit mounted)	5.5 kg
Environmental Factor	Operation Temp : 0°C ~ + 55°C
	Storage Temp : -20°C ~ + 60°C
	Humidity : up to 90%
Certification	ABS, BV, CCS, DNV GL, LR, KR, NK, IEC60945
Warranty	36 months

Marine used Monitor

•TVK-DM-002

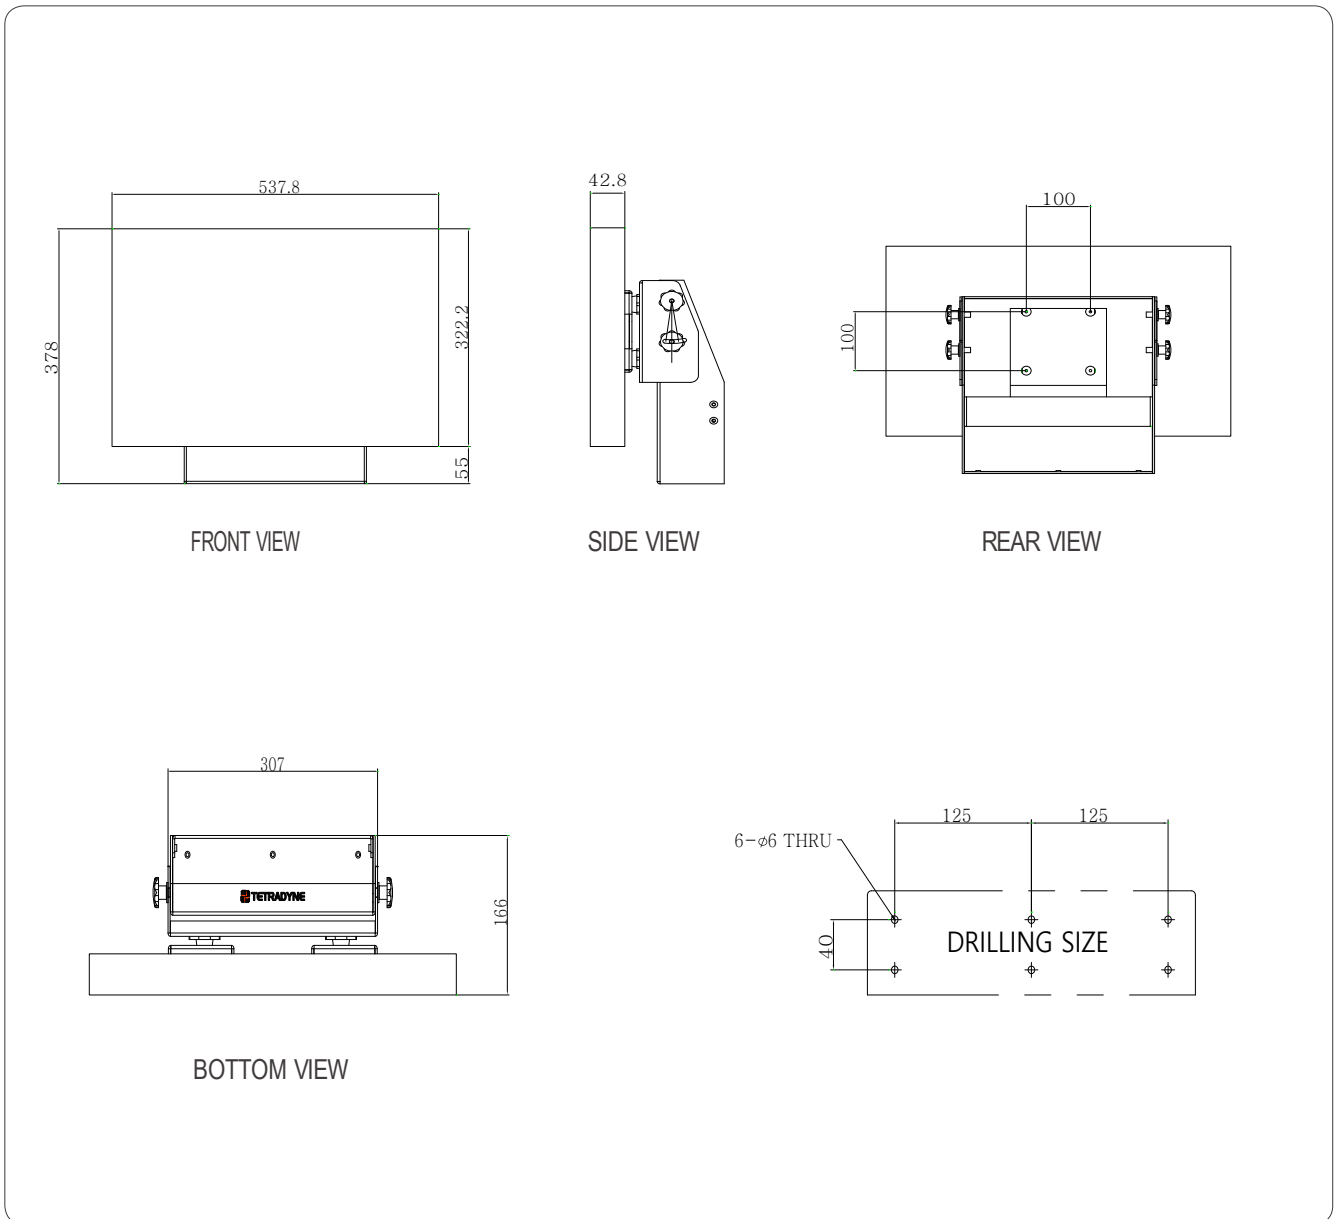

#604/605, E&C VENTURE DREAM TOWER II, 55, DIGITAL-RO 33-GIL,
GURO-GU, SEOUL, 08376, REP KOREA
Tel : +82-2-323-4972, E-mail : sales@tetrydyne.co.kr Web site : www.tetrydyne.co.kr

Specifications and features are subject to change without notice.
All products names are trademarks or registered trademarks of Tetrydyne.co.,Ltd.

Contact Point